



**P01-52**

P01 Series



## Push Wire Connectors

P01- 2/ - ( )

→ Insulation Materials

P: PP

C: PC

→ Side Panel Color

0: Black

82: Gray

...

→ Housing Color

82: Gray









10: Transparent

...

→ Number of connection points: 2, 3, 4, 5, 8

Item No.		P01-52	
Electrical Data			
		IEC/EN	UL
Rated Voltage (V)		450	600
Rated Current (A)		24	-
Ambient Temperature	Polycarbonate	T110	105°C
Connection Data			
		IEC/EN	UL
Cross Section	Solid conductor	0.75-2.5mm <sup>2</sup>	AWG 14-20
	Stranded conductor	1.0-2.5mm <sup>2</sup>	AWG 14-18
Strip length (mm)		13	
Means of connection		push in	
Rewirable		√	
Number of terminals		single	
Number of connection points		5	
Materials			
Insulation Materials	Designation	Polycarbonate, Polypropylene	
	Flammability class	UL 94V-2	
Packing Quantity (pcs/carton)			
2000			

P01-52

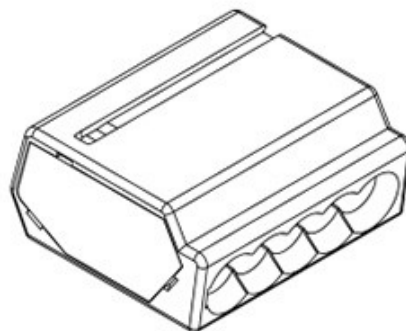

A向

Ø2.40